

# DV3 Series MPEG-4 Digital Video Recorders



## NVDV3-4000N/8000N/16000N



### Key Features

- Available in 4, 8, 16-ch Models
- Embedded Linux Operating System
- Built-in Multiplexer
- Quadruplex Function - Simultaneous Record / Playback / Network / Backup
- High Resolution
- MPEG-4 Compression
- Multi-screen Display: Live Monitor, Playback, Remote View
- Multiple Video Outputs: Composite, S-Video, Spot, VGA
- User Friendly Graphic Menu
- Hidden / Covert Camera Function
- Built-in Backup Device: CD-RW
- External Backup Device Support(USB2.0): Memory Stick, External HDD
- Mini Player: Auto Installation into CD during backup
- Watch Dog / Power Failure Recovery
- RS-422/485 for PTZ Speed Dome and Keypad Controller
- Keypad Controller with Joystick(Option) - Control Multiple DVRs and PTZ Speed Domes
- Support Various PTZ Protocols
- Time Synchronization between Multiple DVRs
- 4 or 8-ch Audio with Remote Audio over Network
- Software Upgrade via USB Memory Stick
- Upto 1.5TB of Internal Storage
- IR Remote Controller - Control upto 99 DVRs
- POS Support

### Graphic Menu



### Remote Client Software

- Multi-site/Enterprise Level Client Software or Web Browser(Internet Explorer 6.0)
- Remote Access & Total Management from Client PC
- Static and Dynamic IP Support
- Proprietary Dynamic DNS Service for Plug-n-Play Remote Connection
- Automatic E-mail Notification: Alarm, Video Loss, Power Loss, HDD Failure
- POS Support



#### Multi-site Remote Monitoring

Monitor upto 64 cameras from multiple DVRs, in any combination. Control PTZ Speed Dome Cameras from remote site.



#### Remote Search & Backup

From remote location, search and playback recorded images. In addition, backup images into remote PC. Manual, Schedule & Event Activated backup are possible.



#### System Configuration

Full configuration is possible from remote client software.



#### Status Report

Connect upto 300 DVRs simultaneously and receive each DVR's status report in real time. DVR ID, HDD Fail, Alarm, Motion, Video Loss, Power Loss, Fan Lock, Recording Off.



#### PTZ Control


Multiple PTZ protocols are supported.



#### Remote Audio

From Remote PC, live audio could be accessible over network by selecting the channel. Simultaneous remote monitoring of both video & audio is possible.

### System Configuration

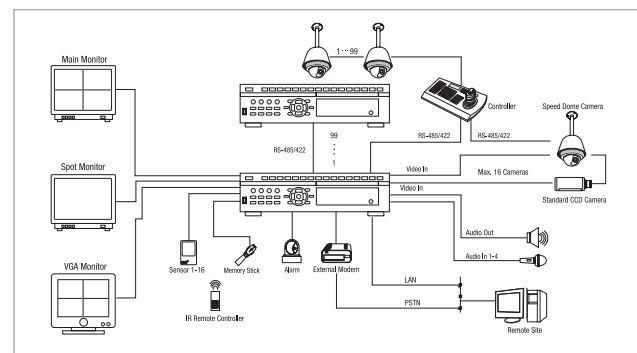

### NUVICO

53 Smith Street, Englewood, NJ 07631  
Phone 201-541-1605 Toll Free 866-523-1700 Fax 201-541-1620  
sales@nuvico.com [www.nuvico.com](http://www.nuvico.com)

NUVICO reserves the right to alter product offers and specification at any time without notice.  
Copyright © 2007 NUVICO. All rights reserved.



Connecting Video Anywhere™

# DV3 Series MPEG-4 Digital Video Recorders




## Specifications

SPECIFICATIONS	NVDV3-4000N	NVDV3-8000N	NVDV3-16000N
Video Signal	NTSC		
Operating System	Embedded Linux		
Quadruplex Function	Simultaneous Record / Playback / Network / Backup		
Video Input	4	8	16
Video Output	1 Main Monitor, 1 S-Video, 1 Spot, 1 VGA		
Loop Out	4	8	16
Live Displays	1, 4, PIP	1, 4, 6, 8	1, 4, 6, 8, 9, 13, 16
Playback Displays	1, 4,	1, 4, 6, 8	1, 4, 6, 8, 9, 13, 16
Video Compression Method	MPEG-4		
Average File Size	2.5 ~ 8 KB		
Live Display Resolution	720 x 480	720 x 480	720 x 480
Live Display Rate	120pps	240pps	480pps
Recording Rate & Resolution	120pps@360x240 60pps@720x240 30pps@720x480	120pps@360x240 60pps@720x240 30pps@720x480	120pps@360x240 60pps@720x240 30pps@720x480
Alarm In / Out	4 / 1	8/1	16/1
System Control	Key Buttons, IR Remote Controller, Remote Client PC		
Audio In / Out	4 / 1	8/1	16/1
PTZ Dome & Controller Interface	RS-422 / 485		
FEATURES	NVDV3-4000N	NVDV3-8000N	NVDV3-16000N
Display Settings	Brightness, Contrast, Color Adjustments, Hidden/Covert Per Channel		
Camera Title	8 Characters Per Channel		
Recording Modes	Continuous, Schedule, Alarm, Motion, Overwrite		
Recording Adjustments	8 Levels of Resolution / Recording Frame Rate Adjustment per Channel		
Pre-Alarm & Post Alarm Recording	Pre-Alarm: 140pps / Post-Alarm: 20 sec. ~ 240 sec.		
Motion Detection Per Channel	16 Selectable Grids / 15 Sensitivity Levels		
Search Modes	Time & Date, Camera, Alarm, Motion		
Playback Modes	Forward & Reverse: Pause, Field by Field, Normal Speed, 2X, 4X, 8X, 16X		
Power Failure Recovery	Auto Reboot while Maintaining Previous Record Settings		
Alarm Notification	Automatic E-mail : External Alarm, Video Loss, Power Loss, HDD Failure		
System Utility	2-Level Password / Auto Lock / Disk Format / Disk Check / Fan Lock Detection		
Internal Backup Device	CD-RW or DVD-RW		
External Backup Device	USB2.0: Memory Stick & External HDD		
Mini-Player for Backup	Installing dedicated software into PC is not required to playback files from CD or DVD		
Communication Port	USB2.0, RS-232C, RS-422/485, Ethernet		
Storage Capacity	Upto 1.5TB: 3 Internal HDD Bays		
Network	LAN, WAN, Internet, PSTN Line		
External Telephone Modem Support	RS-232C		
Remote Client Software	Multi-site / Enterprise Level Client Software or Web Browser(IE 6.0)		
Dynamic IP Support over Cable	Dedicated Host ID per unit. DVR will automatically self reconfigure everytime IP address changes		
IR Remote Controller	Control Upto 99 DVRs		
GENERAL	NVDV3-8000N	NVDV3-8000N	NVDV3-16000N
Power	100 ~ 230VAC, Selectable		
Dimensions	360(W) x 340(D) x 100(H)		
Weight	6 Kg		
Operating Temperature	0°C ~ 40°C		

Specifications are subject to change without any prior notice.

## Rear View

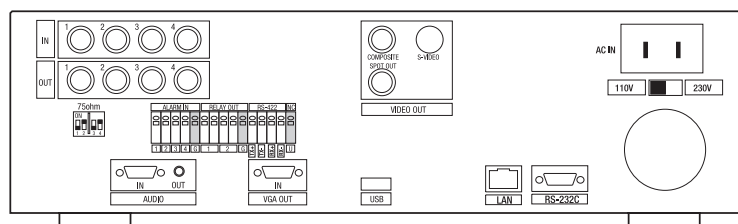

### NUVICO

53 Smith Street, Englewood, NJ 07631  
Phone 201-541-1605 Toll Free 866-523-1700 Fax 201-541-1620  
sales@nuvico.com [www.nuvico.com](http://www.nuvico.com)

NUVICO reserves the right to alter product offers and specification at any time without notice.  
Copyright © 2007 NUVICO. All rights reserved.

**NUVICO**<sup>®</sup>  
Connecting Video Anywhere<sup>™</sup>