


SMT-3211

32" Large Format LCD Display



Dimensions (unit : in)

Front/Rear Panel

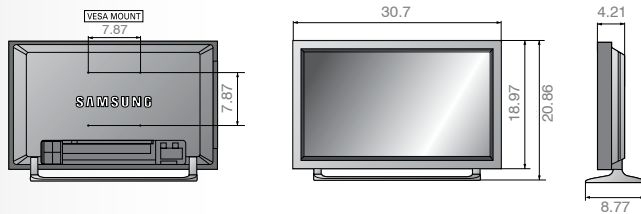

Matrix Display for Video Wall

Built-in image enlarging that supports 2x2, 3x3, 4x4, 5x5, 1x2, 2x1, 1x5, 5x1 video walls. You don't need any video controller device. To use video and PC interface, an additional input signal distributor is not necessary either.



Summary

The SMT-3211 large format monitor provides Multi Display Control (MDC) function that allows you to control up to 10 units from your PC with the supplied MDC software.

The Built-in Video Wall Image Enlarging Processor supports 2 x 2, 3 x 3, 4 x 4, 5 x 1 and 1 x 5 video walls without the need of requiring any separate video controller device. No additional input signal distribution is necessary to use the video and PC interface.

The 2-Way Video Wall Display in "Full" mode displays the picture regardless of cabinet bezel and in "Natural" mode considers the bezel's depth and adjusts for a properly proportioned picture.

Multiple Connections

Many monitors have limited feature sets and lack the versatility to connect to the video devices in a system. SAMSUNG Electronics LCD Displays provide multiple video formats such as D-Sub, RS232C Cable, DVI-D, USB 2.0, S-Video, CVBS Video, BNC that may be missing from a lower cost monitor.

Features

- Anti Image Burn/Pixel Cleansing
- Extended Video Wall Format
- Picture in Picture(PIP) and Picture by Picture(PBP)
- Superior Images Quality
- Wide Angle Viewing
- 8ms Response Time
- 24/7 Operation with Built in Power Supply
- Multiple Inputs: D-Sub, RS232C cable, DVI-D, USB 2.0, S-Video, CVBS Video, BNC
- VESA Wall Mount Standard

Specifications

Picture	Screen Size	32"
	Resolution	1366 x 768 pixels, 500TV Lines
	Brightness (cd/m ²)	410cd/m ²
Panel	Contrast	1,000:1
	Response Time	8msec(GTG)
	Viewing Angle Degree	(Horz/Vert) 178°/178°
Picture	Color Supported	16.7 Mil
Video Signal	Analog RGB, DVI-D, Composite S-Video, Component Video	
Sync. Signal	Separate H/V, Composite, SOG	
Connector	D-Sub, RS232C Cable, DVI-D, USB 2.0, S-Video, CVBS Video, BNC	
Power	Power Consumption	160 Watts @ 120 VAC
	Stand By Power (DPMS)	<1 Watts
Type	Internal	
Plug & Play	DDC 2B	
Multimedia Speakers	10Wx2ch (Option)	
Special Features	Anti-image retention, Matrix Video Wall (2x2, 3x3, 4x4, 1x5, 5x1, 5x5), Safety Lock, PIP / PBP, VESA Wall Mount Standard, Signal Balance, Vertical Input, External AV Devices	
PC Compatibility	Windows/Mac	
Wall-Mount	Mounting Kit Available (Option)	
Cabinet Color	Black	
Accessories	MDC Programme, User Manual, Tablefoot 2 pcs, RCA RCA Adapter 4 pcs, Power Cable, Remote controller	
Physical Specification	Product Weight	16.1kg / 35.4 lbs
	Shipment Weight	21.4kg / 47.0 lbs
	Product Dimension (WxHxD)	(W/ Stand) 30.7 x 20.8 x 8.8 in / 780 x 530 x 223 mm (W/Out Stand) 30.7 x 18.9 x 4.2 in / 780 x 482 x 107 mm
	Shipment Dimension	35.3 x 23.6 x 10.3 in / 898 x 600 x 262 mm
Environmental Conditions	Operating Temperature	50° ~ 104°F(10° ~ 40°C)
Stand (Type)	Foot Stand	